
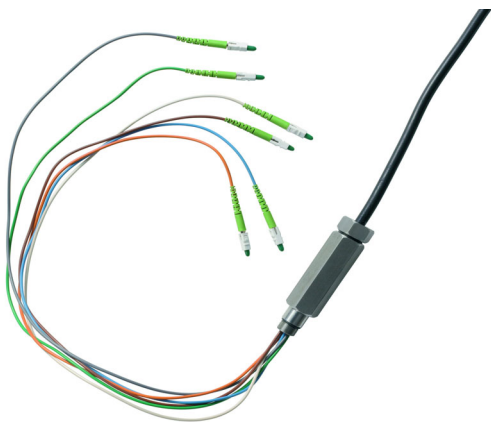


DESCRIPTION

Radiant Communications can customize fiber optic drop cables to meet your specific requirements.

Please contact us with your job's details.

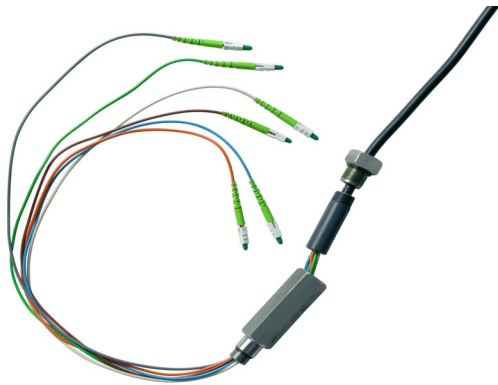

**Radiant
Communications
Corporation**

Fiber Optic Drop Cable

BENEFITS

Back reflections-60 dB with Ultra Polished Terminations

Drop Cable is preterminated with your connector type

Customer Specified Node Hub Connector

FEATURES

Typically 2 to 12 fibers

Fits all standard CATV receiver boxes

Perfect to use with our Aerial Splice Box

Phone: 908 757 7444 or 800 969 3427
Fax: 908 757 8666
E-mail: sales@rccfiber.com
www.rccfiber.com

P.O. Box 867
South Plainfield
NJ 07080
USA

12/2005

▶ Fiber Optic Drop Cable

SPECIFICATIONS

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
P-Y-SM-DDXZ-SNX	Dielectric jacketed drop cable with specified connectors, number of fiber and length

Example -

P-A-SM-DDA6-SN60 Pigtail SC/APC 6 fiber 60 foot CATV grade service cable with 5/8" threaded node connector

Note:

- Specify Y—connector type: A—SC/APC, B—FC/UPC, D-ST, E—SC/UPC, S-FC/NAPC, Z—FC/APC,
- Specify Z - number of fibers
- Specify X –length in feet
- Call factory for other optical connector types
- For armor cable call factory
- Due to product enhancements, specifications are subject to change without notice



**Radiant
Communications
Corporation**

Phone: 908 757 7444 or 800 969 3427
Fax: 908 757 8666
E-mail: sales@rccfiber.com
www.rccfiber.com

P.O. Box 867
South Plainfield
NJ 07080
USA

12/2005