

DESCRIPTION



Radiant Communications AB310 Series can be ordered as a multimode or singlemode transmission system. The system can transmit distances of up to 120+ km on singlemode fiber, and 5 km on multimode. The AB310 Series, which transmits high-quality 2-wire audio signals two-way, can be ordered as a standalone or rack mounted in our CR200 19" x 525" rack. Like all Radiant Communications transmission systems, no adjustments are required at time of installation, or anytime thereafter.

BENEFITS




- Two-Way Audio Over One or Two Fibers
- Plug and Play operation

FEATURES



- Two-Way Audio Over One or Two Fibers
- Multimode Distances up to 5km
- Singlemode Distances up to 120+ km
- AGC Circuitry
- Diagnostic Indicators

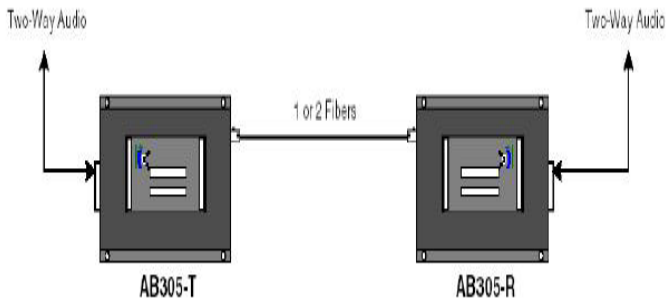

**Radiant
Communications
Corporation**

Phone: 908 757 7444 or 800 969 3427
 Fax: 908 757 8666
 E-mail: sales@rccfiber.com
www.rccfiber.com

P.O. Box 867
 South Plainfield
 NJ 07080
 USA

▶ AB310 Two Way Audio

SPECIFICATIONS

Audio

Bandwidth: 20 Hz to 20 kHz
 SNR: 66 db
 THD: <1%
 Connector: Audio
 10-pin screw terminal

Optical

Wavelength: 850nm, 1310nm, 1550nm, CWDM, DWDM
 Number of Fibers: 1
 Optical Connector: SC/APC, SC, ST, FC, FC/APC

General Characteristics

Power: 1.5 Amp @ 5VDC
 Operating Temperature: 0° to 50° C
 Storage Temperature: -40° to 85° C
 Size: rackmount 17.0" W x 13.0" D x 1.75" H
 module 4.55" W x 7.0" D x 1.95" H
 Card cage 2 Slots in CR200 for 1 Fiber unit
 1 Slot in CR200 for 2 Fiber unit

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	ATTENUATION	MAX DISTANCES
AB310M-T-XY8	1 Channel Audio Transceiver, 1 Fiber, MM 850/1310 nm	10 dB	0-3 km
AB310M-R-XY3	1 Channel Audio Transceiver, 1 Fiber, MM 1310/850 nm	10 dB	0-3 km
AB310M-T-XY8	1 Channel Audio Transceiver, 2 Fibers, MM 850nm	10 dB	0-3 km
AB310M-R-XY8	1 Channel Audio Transceiver, 2 Fibers, MM 850nm	10 dB	0-3 km
AB310S-T-XY3	1 Channel Audio Transceiver, 1 Fiber, SM 1310nm	18 dB	0-50 km
AB310S-R-XY3	1 Channel Audio Transceiver, 1 Fiber, SM 1310nm	18 dB	0-50 km
AB310S-T-XY3	1 Channel Audio Transceiver, 2 Fibers, SM 1310nm	18 dB	0-50 km
AB310S-R-XY3	1 Channel Audio Transceiver, 2 Fibers, SM 1310nm	18 dB	0-50 km

Note:

- Specify X—packaging of the unit: U—IU rack mount, M—modular (standalone) mount
- Specify Y—connector type: A—SC/APC, E—SC, B—FC, Z—FC/APC, D-ST
- For higher optical budgets and distances, CWDM and DWDM systems, contact factory
- Due to product enhancements, specifications subject to change without notice



**Radiant
 Communications
 Corporation**

Phone: 908 757 7444 or 800 969 3427
 Fax: 908 757 8666
 E-mail: sales@rccfiber.com
 www.rccfiber.com

P.O. Box 867
 South Plainfield
 NJ 07080
 USA

2/2005