




Radiant Communications Corp

www.rccfiber.com (888) 412-0124

RM1121
Remote Monitoring
Encoder



Radiant Communications offers the first flexible and cost effective solution of your entire channel lineup over the internet or your existing local area network (LAN).

The RM1121 can monitor up to four CATV boxes at remote hubs with multiple channel lineups. The RM1121 includes up to four IR blasters plus four video inputs. Although there are four inputs, only one input can be viewed at a time. The RM1121 transmits audio and video signals via a H.264 encoder.

With PCVision 3.6 software you can monitor up to 9 real time feeds via one computer monitor from your region or nationwide CATV system.

Benefits

Diagnose problems remotely without truck rolls.

Monitor AD Sales Channels from multiple zones all at one time.

Monitor multiple hub locations within your network at one time.


Monitor up to four CATV boxes.

Features

Expandable system. Add additional sites easily at any time.

Works on intranets and internet.

Now H.264 Encoding

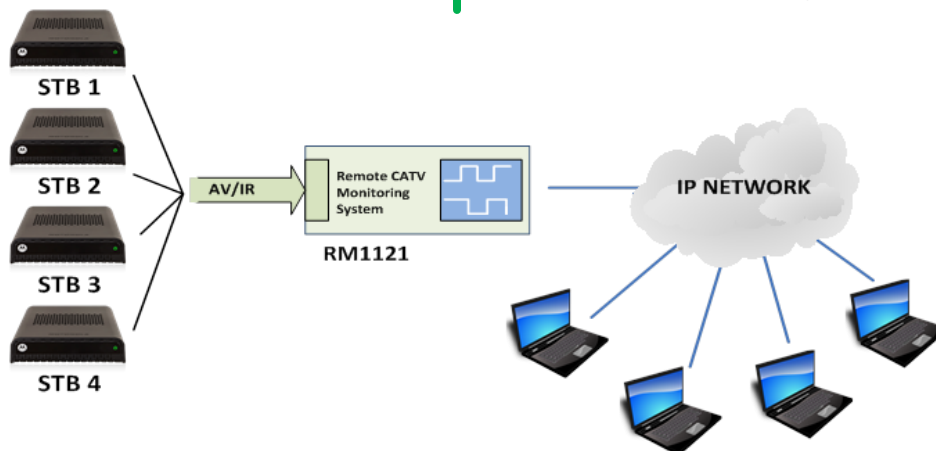



Radiant Communications Corp

www.rccfiber.com (888) 412-0124

RM1121

Remote Monitoring
Encoder



Specifications

Video

Up to four CVBS Inputs
System: NTSC/PAL
Level: 1Vp-p
I/O Level: 75 Ohms

Audio

Four selectable stereo inputs
Type: Line in/Line out
SNR: 77dB

Encoder

RTSP encapsulated MPEG-TS
H.264 SD Encoder
Bandwidth: 30kbs to 4 Mbs

General Characteristics

Power: 10W@90 to 240VAC
Operating Temperature: 0° to 50°C
Storage Temperature: -20° to 70° C
Size: 17"W x 13"D x 1.75"H



Ordering Information

RM1121-1 One Chan Audio/Video Encoder , 1 x CVBS, 1 x IR
RM1121-2 Two Chan Audio/Video Encoder , 2 x CVBS, 2 x IR
RM1121-3 Three Chan Audio/Video Encoder , 3 x CVBS, 3 x IR
RM1121-4 Four Chan Audio/Video Encoder , 4 x CVBS, 4 x IR

RM1106 One Chan Audio/Video Encoder , 1 x CVBS, 1 x IR,
Mini Chassis